

			Includes:
			a. two pieces of
			Ф6.3mm×80mm wooden
			screws
			b. two pieces of Aluminium
			fixing nuts
			c. four pieces of A2-70 M8
			Hexagon screws
Adjustable			d. one piece of M8 antiskid
Roof-Rear		AL	washer
Support Foot	100	6005-T5	e. one piece of M8 spring
and Leg			washer
	90		f. two pieces of EPDM
			waterproof gaskets
			_
			We offer three sizes of
			adjustable tilt legs to suit
			10-15 deg,15-30 deg, and
			30-60 deg, pls see intallation
			manual P21.
	Roof-Rear Support Foot	Roof-Rear Support Foot	Roof-Rear AL Support Foot 6005-T5

www.hopergy.com 11




We offer a range of three sizes of adjustable tilt kits: 10-15 deg,15-30 deg, and 30-60 deg to suit most requirements as per the below illustrations.



10-15° adjustable mounting



15-30° adjustable mounting

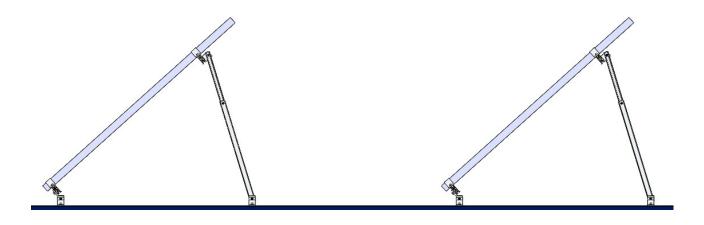

30-60° adjustable mounting

www.hopergy.com 21