

Tiger N-Type 60TR

355-375 Watt

MONO FACIAL MODULE

N-Type

Positive power tolerance of 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems



Tiling Ribbon Technology

Key Features



Multi Busbar Technology

MBB solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



POSITIVE QUALITY™
Continuous Quality Assurance

LINEAR PERFORMANCE WARRANTY


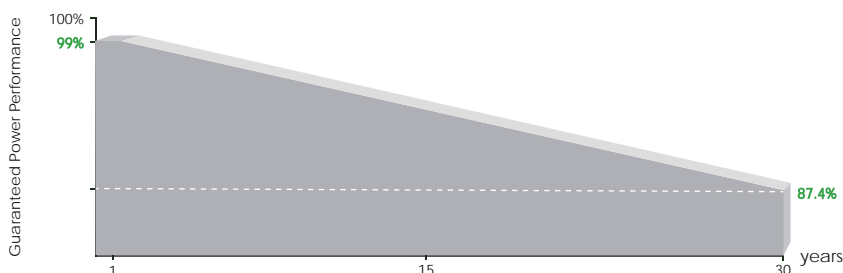


15 Year Product Warranty

30 Year Linear Power Warranty

0.4% Annual Degradation Over 30 years

Engineering Drawings

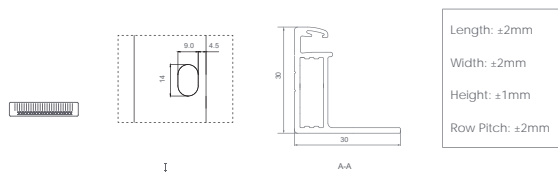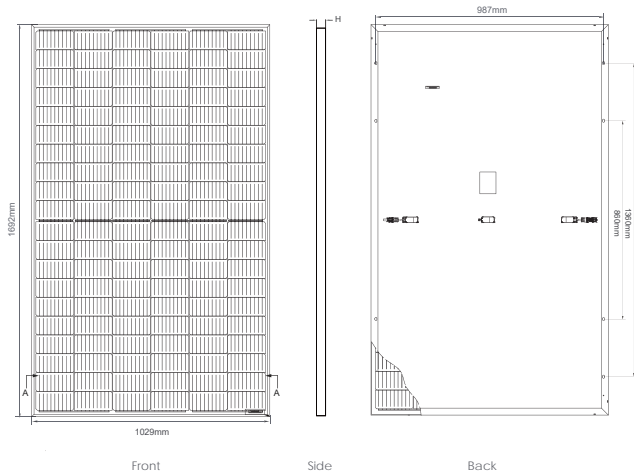


Packaging Configuration

(Two pallets = One stack)

35pcs/pallets, 70pcs/stack, 910pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

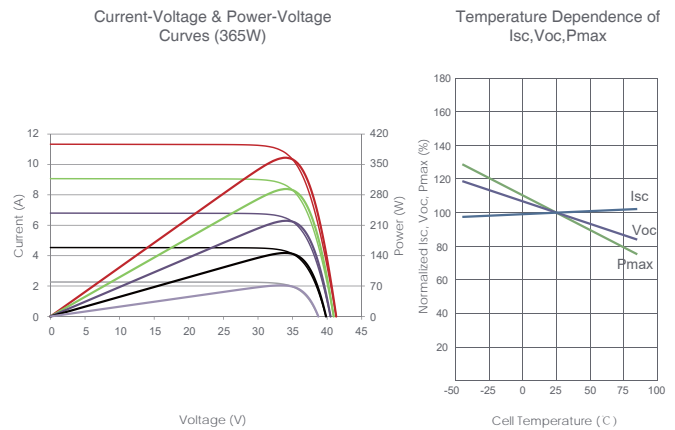

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	120 (6×20)
Dimensions	1692×1029×30mm (66.61×40.51×1.18 inch)
Weight	19.0 kg (41.89 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 290mm, (-): 145mm or Customized Length

SPECIFICATIONS

Module Type	JKM355N-6TL3 JKM355N-6TL3-V		JKM360N-6TL3 JKM360N-6TL3-V		JKM365N-6TL3 JKM365N-6TL3-V		JKM370N-6TL3 JKM370N-6TL3-V		JKM375N-6TL3 JKM375N-6TL3-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	355Wp	265Wp	360Wp	268Wp	365Wp	272Wp	370Wp	276Wp	375Wp	280Wp
Maximum Power Voltage (Vmp)	34.04V	31.40V	34.19V	31.58V	34.34V	31.72V	34.49V	31.88V	34.63V	32.03V
Maximum Power Current (Imp)	10.43A	8.43A	10.53A	8.50A	10.63A	8.58A	10.73A	8.65A	10.83A	8.73A
Open-circuit Voltage (Voc)	41.01V	38.71V	41.16V	38.85V	41.31V	38.99V	41.46V	39.13V	41.60V	39.26V
Short-circuit Current (Isc)	11.13A	8.99A	11.23A	9.07A	11.33A	9.15A	11.43A	9.23A	11.53A	9.31A
Module Efficiency STC (%)	20.39%		20.68%		20.96%		21.25%		21.54%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum System Voltage	1000/1500VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of Pmax	-0.34%/°C									
Temperature Coefficients of Voc	-0.28%/°C									
Temperature Coefficients of Isc	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

*STC: Irradiance 1000W/m² Cell Temperature 25°C

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s

Tiger N-Type 370W

Your best choice

for residential PV projects

** This flyer is only subject to the promotion of N-type modules in AU area.*



Higher module
efficiency



TR Technology
Half Cell



Exceptional
LID performance



Higher Lifetime
Power yield



HOT 2.0
Technology