



LIGHTWAY SOLAR MODULE

LW6M60 Series KEY FEATURES

19.29%
Max Efficiency

315W
Max Peak Power

10YEAR
Product Warranty

25YEAR
Linear Power Warranty



Positive Tolerance 0-5W

Provides our customers with maximum power output



Electric Current Classification

System output maximized by reducing mismatch losses up to 2% with modules sorted and package by amperage



Excellent Weak Light Performance

Relative change of module efficiency at 200W/m² is less than 4%



Upto 5400Pa Mechanical Load

Module certified to withstand extreme snow load



Passed Ammonia Gas And Salt Mist Corrosion Resistance Test

Tested and approved by TUV according IEC 62716 and IEC 61701



PID-Free


Module without potential induced degradation even under high temperature and high relative humidity condition



System Certification

ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007


PERFORMANCE AT LOW IRRADIANCE

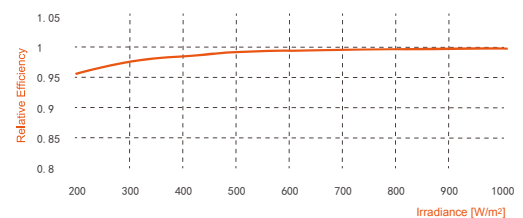

The typical relative change in module efficiency at an irradiance of 200W/m² in relation to 1000W/m² (both at 25°C and AM 1.5 spectrum) is less than 4%.

LINEAR WARRANTY

- 10-year warranty on materials and workmanship
- 25-year warranty > 80% power output
- 3% degradation rate the first year
- 0.70% yearly linear degradation

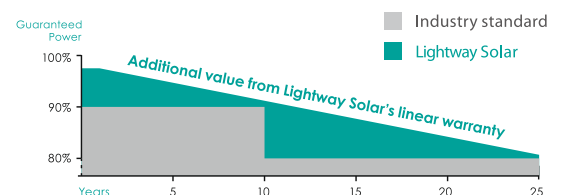

ELECTRICAL DATA @ STC

Values at standard test condition STC: air mass AM 1.5, irradiance 1000W/m², cells temperature 25 C.

Module Type		LW6M60-315(W)	LW6M60-310(W)	LW6M60-305(W)	LW6M60-300(W)	LW6M60-295(W)
Peak Power_Pmax	W	315	310	305	300	295
Power tolerance_ΔPmax	W	0,+5				
Voltage at Pmax_Vmpp	V	33.28	33.06	32.80	32.58	32.35
Current at Pmax_Imp	A	9.47	9.38	9.30	9.21	9.12
Open Circuit Voltage_Voc	V	40.05	39.80	39.50	39.28	39.02
Short Circuit Current_Isc	A	10.01	9.92	9.85	9.75	9.66
Module Efficiency_η		19.29%	18.98%	18.67%	18.37%	18.06%

ELECTRICAL DATA @ NOCT

Nominal operating cell temperature NOCT: irradiance 800W/m², ambient temperature 20 C, wind speed 1m/s.

Module Type		LW6M60-315(W)	LW6M60-310(W)	LW6M60-305(W)	LW6M60-300(W)	LW6M60-295(W)
Peak Power_Pmax	W	234.56	230.81	226.87	223.19	219.46
Voltage at Pmax_Vmpp	V	31.15	30.94	30.70	30.49	30.27
Current at Pmax_Imp	A	7.53	7.46	7.39	7.32	7.25
Open Circuit Voltage_Voc	V	37.49	37.26	36.98	36.77	36.53
Short Circuit Current_Isc	A	8.06	7.99	7.93	7.85	7.78

TEMPERATURE RATING

Nominal operating cell temperature(NOCT)	°C	45±2
Temperature Coefficient of Pmax	%/°C	-0.4154
Temperature Coefficient of Isc	%/°C	0.0359
Temperature Coefficient of Voc	%/°C	-0.3108

MAXIMUM RATING

Max. System Voltage	1500/1000Vdc
Operating Temperature	-40 ~ +85 °C
Max. Series Fuse Rating	15A
Max. Reverse Current	15A
Max. Mechanical load	5400Pa

CONSTRUCTION MATERIALS

Solar cells	60 mono - silicon cells, 156.75mm*156.75mm
Glass	3.2mm low-iron tempered glass
Encapsulant	ethylene vinyl acetate(EVA)
Frame	anodized aluminium alloy(Silver)
Junction Box	≥IP67 rated, 3/6 diodes
Cable	4mm ² PV cable, 900mm
Connector	MC4 compatible

GENERAL DATA

Module Dimension(L×W×H)	1650×990×35mm
Weight	18.5kg

PACKING

Modules per pallet	31
Pallets per 40' container	28
Packing box dimension(L×W×H)	1700×1140×1160mm

